



Manually marking a group commit

Tags: [Flow](#)

Manually marking a commit as a group commit allows you to ensure that both developers are getting credit for their work on the commit.

In this article

[Permissions](#)

[Marking a commit as a group commit](#)

Who can use this?

Core



Plus



Permissions

In order to manually mark a commit as a group programmed commit, you will need access to the following permissions:

- Manage commits
- Work log


Additionally, your group programming settings will need to be turned on. Learn how to turn on your [group programming settings](#).

[back to top](#)


Marking a commit as a group commit

Once you have all the necessary permissions and your group programming settings have been turned on, you can now manually mark any commit as a group commit.

1. Navigate to the **Daily check reports** and click on **Work log**.
2. Locate the commit that you want to mark as a group commit. Click on the commit, then click the three dots icon to open the drop down menu. Click **Mark as a group commit**.

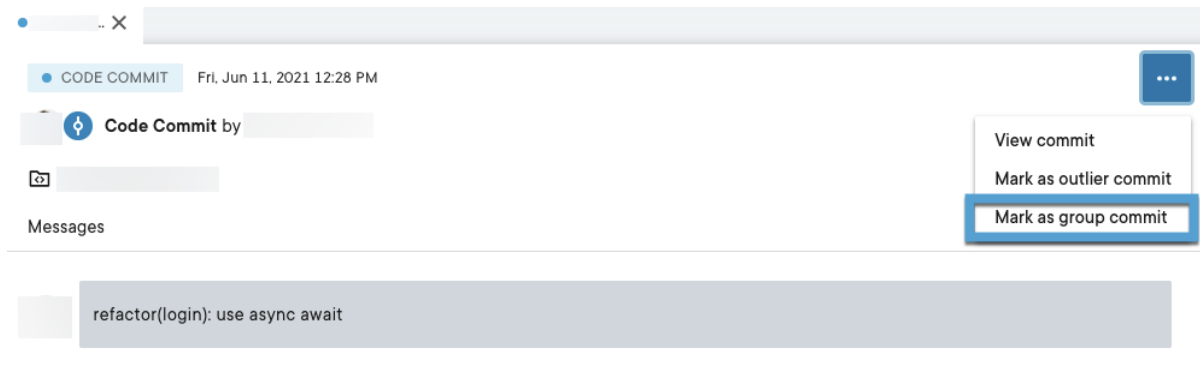

3. In the modal, search for and select the user you want to add as a group programmer to this commit. Remove contributors by clicking the **x** next to the name or clicking **Clear all**.

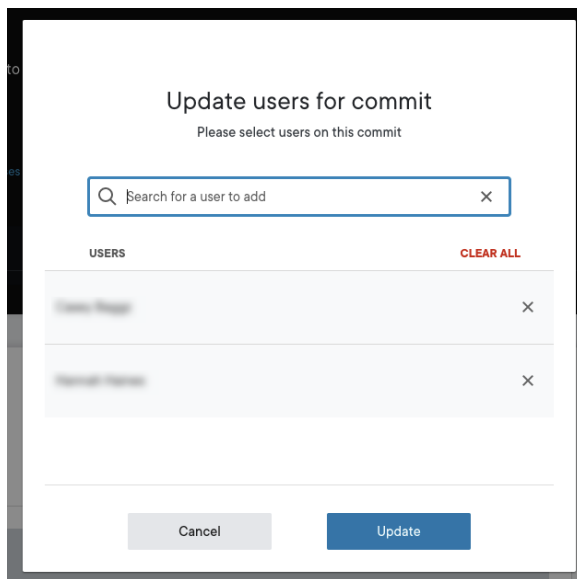

4. Click **Update** once you have added all the necessary users to the commit.
5. You will see a success banner. The commit now appears as a square when the **Group** filter is selected in Work log. The authors of the commit have been changed to match all group programmers on the commit.

If you need help, please email support@pluralsight.com for 24/7 assistance.