

Manually marking a pair commit

Overview

Manually marking a commit as a pair commit allows you to ensure that both developers are getting credit for their work on the commit.

Permissions

In order to manually mark a commit as a pair programmed commit you will need access to the following permissions:


- Manage Commits
- Work Log

Additionally, your group programming settings will need to be turned on. Learn how to turn on your [group programming settings](https://pluralsight.knowledgeowl.com/help/pair-programming). (<https://pluralsight.knowledgeowl.com/help/pair-programming>)


Marking a commit as a pair commit

Once you have all the necessary permissions and your pair programming settings have been turned on, you can now manually mark any commit as a paired commit.


1. Navigate to the **Operational reports** and click on **Work log**.

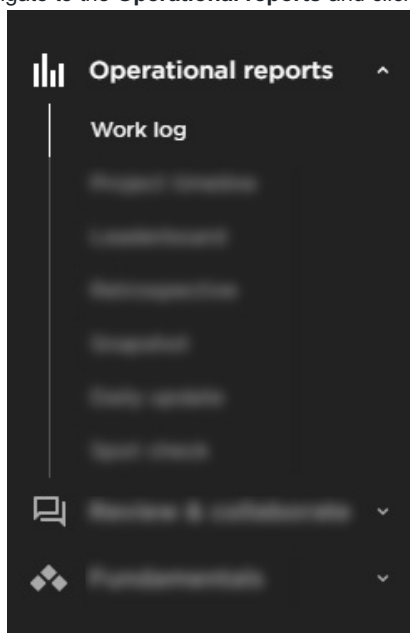

2. Locate the commit that you want to mark as a group commit. Click on the commit, then click the three dots icon to open the drop down menu. Click **Mark as a group commit**.

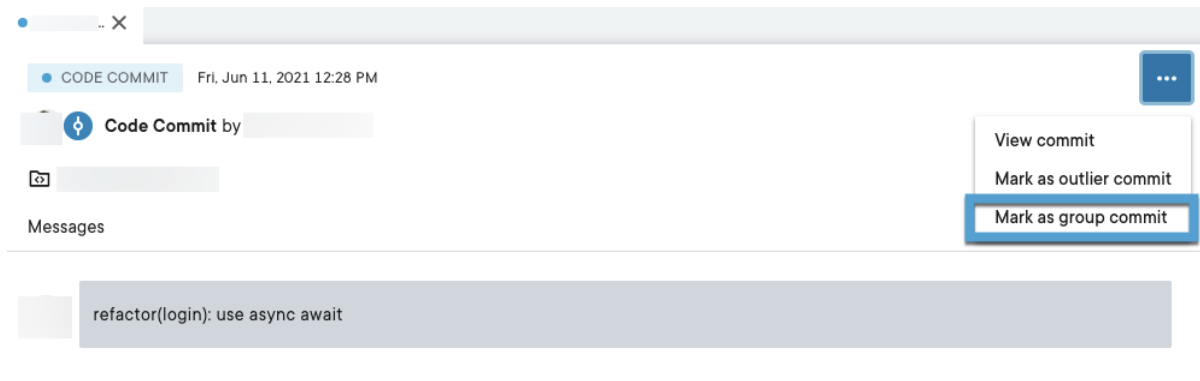

3. In the modal, search for and select the user you want to add as a pair programmer to this commit. Remove contributors by clicking the **x** next to the name or clicking **Clear all**.

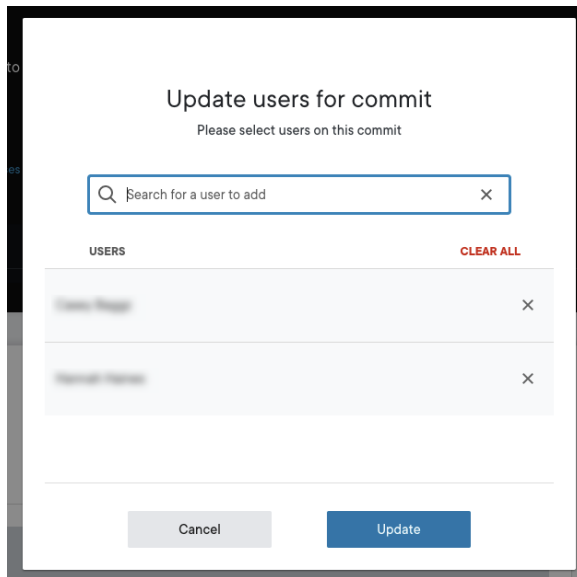

4. Click **Update** once you have added all the necessary users to the commit.
5. Success! You have manually parked this commit as a group commit. You will see a success banner. The commit now appears as a square when the **Group** filter is selected. The authors of the commit have been changed to match all pair programmers on the commit.

[back to top](#)

If you need help, please email support@pluralsight.com () for 24/7 assistance.